


# Low Volume Vehicle Technical Association Incorporated

# Low Volume Vehicle Standard

# 75-00(00)

# (Electric and Hybrid Vehicles)

*This Low Volume Vehicle standard corresponds with Land Transport Rule: Vehicle Standards Compliance 2002, and Land Transport Rule: Light Vehicle Brakes 2002*

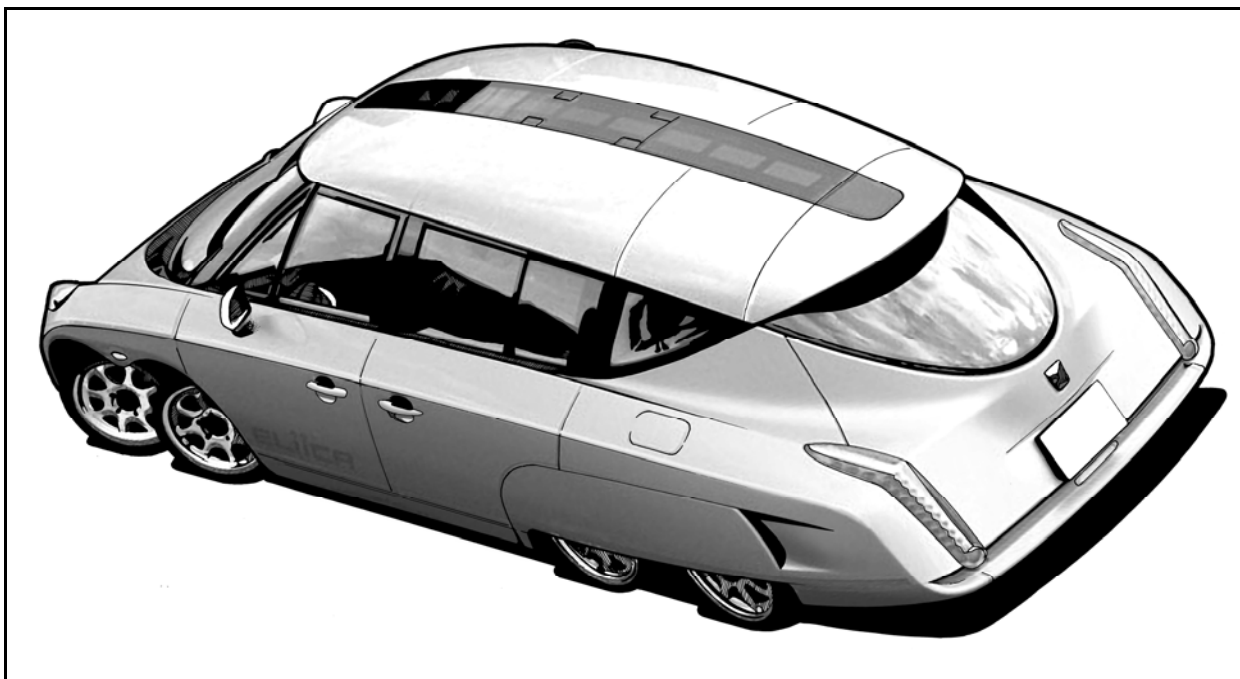

**Original version - effective from: 1 May 2012**

<i>Signed in accordance with clause 1.5 of the Low Volume Vehicle Code, on.....by</i> <i>on behalf of the New Zealand Transport Agency:</i> .....	<i>on behalf on the Low Volume Vehicle Technical Association (Inc):</i> .....
---	--

**LVV Standard 75-00 Amendment Record:**

No:	Detail of amendments:	Issue date:	Effect date:	LVV Code ref. #:
1	Initial issue – original version	December 2011	1 May 2012	Annex 1, LVV Code Issue 7
2				
3				
4				
5				

# Overview

## Background

The Low Volume Vehicle Technical Association Incorporated (LVVTA) represents ten hobbyist and specialist groups who are dedicated to ensuring that their members' vehicles, when scratch-built or modified, meet the highest practicable safety standards. The information in these standards has stemmed from work undertaken by LVVTA founding member groups that commenced prior to 1990 and has been progressively developed as an integral part of NZ Government safety rules and regulations by agreement and in consultation with the New Zealand Transport Agency. As a result, the considerable experience in applied safety engineering built up by LVVTA over the past twenty years is available to members of the NZ public and the modification industry who may also wish to build or modify light motor vehicles.

## Availability of low volume vehicle standards

Low volume vehicle standards are developed by the LVVTA, in consultation with the New Zealand Transport Agency, and are printed and distributed by the LVVTA. The standards are available to the public free of charge from the LVVTA website; [www.lvvta.org.nz](http://www.lvvta.org.nz)

Further information on the availability of the low volume vehicle standards may be obtained by contacting the LVVTA at [info@lvvta.org.nz](mailto:info@lvvta.org.nz).

## Copyright

The content of this document remains the property of the Low Volume Vehicle Technical Association (Inc.), and no part of it may be reproduced without the prior written consent of the copyright holder.

# Contents

Purpose of this standard		<b>Page 4</b>
<b>Section 1</b>	<b>Scope and application of this standard</b>	<b>4</b>
1.1	Scope of this standard	4
1.2	Application of this standard	5
<b>Section 2</b>	<b>Technical requirements of this standard</b>	<b>6</b>
2.1	General safety requirements	6
	▪ General operational safety	6
	▪ Tradesman-like manner	6
2.2	Electrical systems	6
	▪ General system requirements	6
	▪ Wiring requirements	8
	▪ Overload protection	9
	▪ External charging circuits	10
2.3	Batteries	10
	▪ Battery restraint	10
	▪ Battery compartments and venting	11
	▪ Battery compartment forced ventilation	12
2.4	Vehicle operation	14
	▪ Instrumentation	14
	▪ Accelerator	15
	▪ Transmission	15
	▪ Braking system	15
2.5	Manufacturer's GVM and MAR	16
2.6	Other requirements	17
	▪ Warning labels	17
	▪ Compliance with other requirements	17
	▪ Extensively modified and scratch-built LVVs	18
<b>Section 3</b>	<b>Exclusions to this standard</b>	<b>18</b>
<b>Section 4</b>	<b>Vehicles that are not required to be certified to this standard</b>	<b>18</b>
4.1	Vehicles not covered by this standard	18
4.2	Vehicles that pre-date legal requirements	18
<b>Section 5</b>	<b>Terms and definitions within this standard</b>	<b>19</b>

# Electric and Hybrid Vehicles

# (75-00[00])

## Purpose of this standard

The purpose of this low volume vehicle standard is to specify requirements for light motor vehicles that are converted to electric or hybrid propulsion, or that are scratch-built using electric or hybrid propulsion, which must be met, in order to ensure that the vehicles are safe during all normal driving conditions, in relation to their electrical systems, and also in relation to any inter-related effects that the electric or hybrid systems might have on other safety-related systems within the vehicle, particularly those governing directional and braking control.

## Section 1 Scope and application of this standard

### 1.1 Scope of this standard

1.1(1) For the purposes of this low volume vehicle standard, a vehicle will be referred to as an electrically-powered vehicle if:

- (a) a vehicle has been converted to electric or hybrid power; or
- (b) a vehicle has been scratch-built using electric or hybrid power; or
- (c) modifications have been made to a vehicle's electric or hybrid systems.

NOTE 1: Item (c) includes the addition of a plug-in charging system, an on-board charging system, additional batteries, or changes to battery chemistry.

NOTE 2: This standard is aimed at systems such as single or multiple electric traction motors, alternative non-electric drive-line power units, charging generators, storage batteries, other electric power sources such as solar cells, and on-board mains chargers. Technically advanced systems such as fuel cells can have wider implications on safety and are outside of the scope of this standard. Refer to LVVTA for individual advice on certification of fuel cells and other similarly complex systems.

1.1(2) An electrically-powered vehicle that has been converted, scratch-built, or modified as in 1.1(1) in New Zealand before 1 January 1992 is not required to be certified to the Low Volume Vehicle Code.

NOTE 1: The requirement for LVV certification in the case of electric or hybrid systems was triggered by the introduction of the Transport (Vehicle Standards) Regulations 1990 which, for low volume vehicles, took effect on 1 January 1992. Because electric or hybrid power may have an effect on the performance of a vehicle's braking system, and Transport (VS) Regulation 1990: (13) Brakes took effect on 1 January 1992, this date becomes the application date of this low volume vehicle standard.

NOTE 2: An electrically-powered vehicle that has been converted, scratch-built, or modified outside of New Zealand must be certified to the Low Volume Vehicle Code, regardless of the date of conversion, build, or modification.

- 1.1(2) An electrically-powered vehicle that has been converted, scratch-built, or modified as in 1.1(1) in New Zealand on or after 1 January 1992, or outside New Zealand on any date, must be certified to the Low Volume Vehicle Code in accordance with the application requirements specified in 1.2.

NOTE: An electrically-powered vehicle that has been converted, scratch-built, or modified outside of New Zealand must be certified to the Low Volume Vehicle Code, regardless of the date of conversion, build, or modification.

## 1.2 Application of this standard

- 1.2(1) An electrically-powered vehicle, other than one specified in 1.2(3), that has been converted, scratch-built, or modified as in 1.1(1) between 1 January 1992 and 1 May 2012 becomes a low volume vehicle, and must:

- (a) be certified in accordance with the procedures specified in *chapter 2* of the *Low Volume Vehicle Code*; and
- (b) comply with the general safety requirements specified in 2.1 of this standard.

NOTE: In order to assess whether or not the general safety requirements contained in 2.1 of this standard have been met, an LVV Certifier may use the applicable technical requirements of *section 2* of this standard as a guideline upon which to base his judgements.

- 1.2(2) An electrically-powered vehicle, other than one specified in 1.2(3), that has been converted, scratch-built, or modified as in 1.1(1) on or after 1 May 2012 becomes a low volume vehicle, and must:

- (a) be certified in accordance with the procedures specified in *chapter 2* of the *Low Volume Vehicle Code*; and
- (b) unless *section 3* applies, comply with all applicable technical requirements contained in *section 2* of this standard.

- 1.2(3) This low volume vehicle standard does not apply to:

- (a) powered bicycles of Class AB; or
- (b) mopeds of Class LA, LB; or
- (c) light trailers of Class TA or TB; or
- (d) those vehicles specified in *section 4*.

## Section 2 Technical requirements of this standard

---

### 2.1 General safety requirements

#### General operational safety

- 2.1(1) A low volume vehicle must:
- (a) be designed and constructed using materials and components that are fit for their purpose; and
  - (b) be safe to be operated on the road.

NOTE: The requirements specified in 2.1(1) are selected from 2.3 of *Part 2* of the *Low Volume Vehicle Code*, reproduced here in the interest of convenience, and are over-riding requirements which make it clear that, regardless of what technical requirements are or are not in place within this standard, every vehicle certified to the *Low Volume Vehicle Code* must be fit for its purpose, and must be safe.

#### Tradesman-like manner

- 2.1(2) Any electrical, mechanical, engineering, or fabrication work associated with a modification or construction feature in a low volume vehicle must:
- (a) be carried out in a thorough, tidy, and tradesman-like manner; and
  - (b) follow sound electrical and automotive engineering principles.

NOTE 1: 2.1(2)(a) specifies that it is an expectation of the LVV certification system that modification work is not only compliant and safe, but is carried out to a reasonable standard. Engineering work that - whilst compliant and safe - has been executed in a manner that makes the job rough or crude in appearance, can bring the LVV certification system into disrepute through observers' perception (rightly or wrongly) of any such work. This in turn can lead to complaint investigations being raised, which can consume time unnecessarily.

NOTE 2: 'Automotive engineering principles' referred to in 2.1(2)(b) is intended to mean those top-end quality engineering principles employed throughout the light passenger vehicle manufacturing industry, and not low-technology industrial equipment such as some fork-lifts.

### 2.2 Electrical systems

#### General system requirements

- 2.2(1) The electrical system within an electrically-powered low volume vehicle must incorporate:
- (a) design features that, in the event of a common malfunction, provide a fail-safe outcome; and

- (b) fail-safe measures such as fuses, circuit breakers or fusible links that offer adequate protection in case of a short-circuit, which must be appropriate for the voltage and have a current carrying capacity less than that of the wiring, main contactors and switches; and
- (c) a master isolation switch within reach of the driver in the normal seated position that isolates all poles of the motor power supply from the motor controller circuitry, either mechanically or electro-mechanically; and
- (d) if situated within a battery compartment with venting-type batteries, flameproof electrical switches and relays; and
- (e) a separate battery or electrical supply management system that provides priority to the power supply needs of the vehicle's safety equipment, such as lighting equipment, brakes, and windscreen wipers; and
- (f) a suitable mechanical maintenance isolation switch, operated without the need for tools, close to each separate group of batteries, to isolate all poles of the batteries such that safe access is provided for maintenance within two minutes of power disconnection; and
- (g) components that are able to operate effectively while subject to typical vehicle operation conditions, such as vibration, and dust and moisture ingress, without leading to fatigue and premature failure; and
- (h) clearly visible labels, as specified in 2.6(1), warning of electric shock hazard on the covers of all compartments which contain high voltage connections.

NOTE 1: Inspecting and maintaining an electric vehicle can be extremely hazardous due to the high voltages present. High voltage is defined as exceeding 60V DC or 25V AC. All work must be carried out with a high regard for personal safety, using appropriate tools and all available safeguards.

NOTE 2: All connections to the high-voltage system as referred to in 2.2(1)(b) should be fused as closely as practical to the battery, including small wires such as sensor-wires on a current shunt or volt-meter.

NOTE 3: Fuses, switches, contactors, and wire insulation as referred to in 2.2(1)(b) must be appropriate for the voltages and current type present in the system. For example:

- use of an automotive blade fuse on a high-voltage circuit could result in a fire if the fuse opens;
- cylindrical glass fuses commonly available are mostly rated for 240v AC, which is quite different from a DC rating and may explode or fail to clear the fault if used with high voltage DC;
- fuses with appropriate ratings are usually ceramic or fibreglass bodied with a sand filling;
- DC contactors often have 'blow out' magnets which blow the arc out of the contactor, improving their ability to clear a high voltage current. Such contactors must not be installed backwards, as the magnets will blow the arc into the contactor and reduce their voltage rating;
- power circuitry should be employed, using relays with two separate contacts for both traction battery polarities - a single relay is not recommended.

NOTE 4: In addition to 2.2(1)(c), a mechanical disconnect between the motor and the drive-train, such as a clutch, is permissible.

2.2(2) The electrical system within an electrically-powered low volume vehicle must be designed to, or incorporate cooling to, maintain operating temperatures during prolonged operation in all typical ambient temperatures that are within the manufacturers' guidelines for all components and systems used within the vehicle's electric power systems.

NOTE: Typical New Zealand ambient operating temperatures referred to in 2.2(2) range from minus 10 degrees C to plus 40 degrees C.

### Wiring requirements

2.2(3) The high voltage (exceeding 60V DC or 25V AC) electrical wiring within an electrically-powered low volume vehicle must:

- (a) be adequately insulated, taking into consideration the system's operating voltage and temperature range; and
- (b) not be electrically connected to the vehicle's chassis or body; and
- (c) be effectively sealed or otherwise resistant to the intrusion of dust and moisture; and
- (d) be contained within a sealed, rigid protective housing where the wiring passes through the passenger compartment or load space; and
- (e) be sized to make allowance for high peak currents in the case of stall or high acceleration of at least 1.5 times the continuous current rating of the motor or controller; and
- (f) be adequately supported and secured to the chassis or other structural section at intervals of less than 350 mm; and
- (g) be positioned against the chassis or other structural section in such a way that it is protected from accidental damage as a result of jacking or road debris; and
- (h) have electrical connections with large voltage differences and high current capabilities positioned apart, so as to minimise the likelihood of short-circuits; and
- (i) have protective covers over any live connections; and
- (j) allow for movement under high load; and

- (k) not be positioned within the roof, body pillars or outer sills; and
- (l) not incorporate sharp bends.

NOTE 1: 'High voltage', as referred to in 2.2(3), is defined as exceeding 60V DC or 25V AC.

NOTE 2: The requirement for sealing of cable housing in 2.2(3)(d) is necessary to prevent noxious gases from entering the passenger compartment following a wire short, arc and overheat situation.

NOTE 3: The requirement for prohibited cable positioning in 2.2(3)(k) is to prevent installation of high voltage cables in areas that emergency services commonly cut open to effect a rescue.

- 2.2(4) The electrical wiring within an electrically-powered low volume vehicle that carries high current loads and/or high voltage, must be orange in colour, and where the wiring is concealed in conduit, the conduit must be orange in colour.

NOTE: Where high voltage cables need to be marked with polarity or other designations, this should be done with a tracer colour along the orange cable length, or with coloured bands at the ends of the orange cable.

### Overload protection

- 2.2(5) The electrical systems within an electrically-powered low volume vehicle must have an over-current protection device system that:
- (a) is an appropriate selection for the design of the electrical system; and
  - (b) is mounted as closely as possible to the power sources, but not within a compartment containing venting batteries, unless the over-current device will not overheat if deployed; and
  - (c) is designed to protect the wiring and electrical components of the electrical drive from over-heating following an over-current situation; and
  - (d) has between 20% and 40% overload capacity, in order to protect the electrical wiring and components of the electrical drive from damage; and
  - (e) is DC rated for the maximum battery voltage and capable of interrupting the maximum short circuit battery current; and
  - (f) protects all connections to the high voltage traction battery and motor wiring, which must include ammeter shunt wiring, volt meter wiring, battery management systems, chargers, and heaters; and
  - (g) in the event of deployment, is not likely to cause itself or any surrounding components to ignite.

NOTE: LVVTA recommends that:

- (a) a battery disconnection device, such as an inertia switch, be fitted to automatically switch off in the event of a vehicle crash; and
- (b) current-sensitive overload relays or controllers be used in place of simple wire or cartridge-type fuses, in order to ensure that a total loss of control to the traction motor cannot occur; and
- (c) cable sizing takes into account any enclosed runs which may limit effective cooling; and
- (d) fuses or circuit breakers should be mounted as near as practical to the electrical middle of the battery pack so that the battery voltage is split into 2 lower voltage sections.

### External charging circuits

2.2(6) The electrical charging system of an electrically-powered low volume vehicle, that takes power from an external source, must:

- (a) be fitted with an interlock which immobilises the vehicle when the charging cable is connected, regardless of the presence of a charging voltage; and
- (b) if 230 volt domestic power or 3-phase supply is directly connected, a Certificate of Compliance must be provided by a registered electrician to confirm that the wiring complies with the *Australia/New Zealand Wiring Standard AS/NZS 3001:2008 - Electrical installations – Transportable structures and vehicles including their site supplies*; and
- (c) not be installed inside a compartment with venting type batteries.

NOTE 1: The battery charging process has a high safety risk from a malfunction. Modern non-venting batteries can still overheat, emit noxious gases, and catch fire.

NOTE 2: Common household wiring is rated at 15 amps but standard plugs are only rated at 10 amps. Plugs and sockets rated to 15 amps are available. Follow EECA/MED guidance for charging needs over 10 amps.

## 2.3 Batteries

### Battery restraint

2.3(1) Batteries used to power an electrically-powered low volume vehicle must be securely fixed in position by a support or restraint system constructed of durable materials that:

- (a) for batteries located rearward of, inside, or under the passenger compartment, is able to withstand:
  - (i) in the forward longitudinal direction, 20 times the combined weight of the battery and restraint system; and

- (ii) in all other directions, 2.5 times the combined weight of the battery and restraint system;

and

- (b) for batteries located forward of the passenger compartment, is able to withstand in all directions, 2.5 times the combined weight of the battery and restraint system.

NOTE 1: Though lead-acid type venting batteries have well-known safety risks, such as acid spillage and venting noxious gases, there are also safety risks with other battery types, including thermal runaway. Care should be taken with the specification of battery and the appropriate installation and control.

NOTE 2: The loadings in 2.3(1) are specified in order to ensure that the very high battery weights are adequately restrained in the event of a crash.

NOTE 3: The strength of a bulkhead that is inter-positioned between any batteries and the passenger compartment may be taken into consideration when assessing the strength of a battery restraint system.

NOTE 4: Where lead-acid batteries or other devices are used that have the potential of releasing corrosive by-products, the selection of materials used in the battery restraint system should take into account the need for the restraint system to be resistant to degradation in the presence of the corrosive materials.

### **Battery compartments and venting**

2.3(2) Batteries that are used to power an electrically-powered low volume vehicle and which have the potential to emit a hazardous liquid or gas, must be effectively sealed off from the passenger compartment so that liquid spillage or gas leakage cannot occur, by either:

- (a) individually sealing the batteries, and externally venting each battery; or
- (b) fully enclosing the batteries within one or more sealed battery compartments, and externally-venting the compartments; or
- (c) positioning the batteries outside of, and away from the passenger compartment, such as in a utility tray.

2.3(3) Battery compartments used to isolate the passenger compartment from hazardous liquid or gas, must:

- (a) incorporate compartment seals made of non-porous material which are resistant to corrosion; and
- (b) be designed so that transmission of flames between battery compartments cannot occur; and

- (c) incorporate trays to catch fluids expelled from the batteries by either:
  - (i) an absorbent neutralising mat in the tray; or
  - (ii) a drip tube that directs fluid away from the vehicle to prevent corrosion;

and

- (d) have, affixed to each compartment, a warning label stating the type of battery and the potential dangers associated with the battery; and
- (e) be resistant to degradation in the presence of corrosive materials.

NOTE: The warning notice positioned on the outside of each battery compartment, as required by 2.3(3)(d) can be achieved by moving or copying a battery manufacturer's warning label from one of the batteries to the outside of the compartment.

- 2.3(4) If venting-type batteries are used, the design of the batteries or battery compartment must provide for venting directly to the atmosphere of all gases given off by normal battery operation.

NOTE: It is critically important to vent the battery compartment as noted in 2.3(4). During recharging of venting type batteries, hydrogen can be given off in quantities sufficient to create an explosion. Hydrogen is lighter than air so will rise in a battery box, so the vent out should be high up, and the air inlet low down.

- 2.3(5) The battery installation must provide ready access for power disconnection of both poles of the system and for maintenance, such as electrolyte top-up, and battery cleaning.

NOTE: 'Ready access' as referred to in 2.3(5) would mean that the system is so enclosed that it could be accessed and the batteries disconnected in less than a minute.

### **Battery compartment forced ventilation**

- 2.3(6) An electrically-powered low volume vehicle fitted with batteries which have the potential to emit a hazardous gas into an enclosed compartment during normal operations, must be fitted with a forced ventilation system that:

- (a) is constructed of materials that are corrosion-resistant to any gas present; and
- (b) is designed in such a way that it will not ignite any gas present; and
- (c) will operate automatically whenever a hazardous gas could be produced; and

- (d) continues to operate for three minutes after any period of automatic operation; and
- (e) operates by extracting gas from the enclosed compartment, and not by blowing in air which could leak out of the compartment; and
- (f) is adequately protected from mechanical damage; and
- (g) has an inlet low down and an outlet high up that are located at opposite ends of the enclosed compartment; and
- (h) has an inlet and an outlet positioned to prevent flow of any hazardous gases into the passenger compartment; and
- (i) has an air flow rate that is sufficiently in excess of any gas evolution of the batteries.

NOTE 1: Examples of the types of designs referred to in 2.3(6)(b) include a sparkless/brushless type fan motor.

NOTE 2: The inlet opening referred to in 2.3(6)(j) should not be placed in the vicinity of the passenger compartment ventilation system inlets or outlets. With the vehicle in motion the outlet should preferably be in an area where the local air pressure is likely to be lower than static atmosphere pressure.

NOTE 3: Consideration needs to be given to filtering the air brought into the battery compartment, and venting potentially explosive gases away from any ignition sources and components susceptible to corrosion.

NOTE 4: The airflow specified in 2.3(6)(i) should be at least 25 times the gas evolution rate.

NOTE 5: A system with a back-up fan should be considered in high-risk installations.

NOTE 6: Where any doubt exists about the adequacy of the ventilation, relevant documentation must be provided from the battery manufacturer confirming that the designed airflow is adequate for the gas evolution conditions specified in 2.3(6).

2.3(7) An electrically-powered low volume vehicle that uses forced ventilation for cooling of components during operation, must be fitted with a system that:

- (a) will operate automatically whenever cooling is required; and
- (b) has an air flow rate that is sufficient to cool where necessary during charge and drive cycles; and
- (c) continues to operate for three minutes after any period of automatic operation; and
- (d) is adequately protected from mechanical damage; and
- (e) has an inlet and an outlet positioned to prevent flow of any gases into the passenger compartment.

NOTE 1: The inlet opening referred to in 2.3(7)(e) should not be placed in the vicinity of the passenger compartment ventilation system inlets and outlets. With the vehicle in motion, the outlet should preferably be in an area where the local air pressure is likely to be lower than static atmosphere pressure.

NOTE 2: Where any doubt exists about the adequacy of the ventilation, relevant documentation must be provided from the battery manufacturer confirming that the designed airflow is adequate for the heat evolution conditions specified in 2.3(7).

NOTE 3: Consideration needs to be given to filtering the air brought into the battery compartment.

## 2.4 Vehicle operation

### Instrumentation

2.4(1) The instrumentation of an electrically-powered low volume vehicle must provide to the driver, a clear visual indication of:

- (a) when the traction motor circuit is live; and
- (b) the state of charge of the batteries (*see note 2*); and
- (c) when the handbrake is on (*see note 5*); and
- (d) in the case of a vehicle fitted with power assisted brakes, such as from a vacuum feed, a loss of power assistance that may result in a loss or reduction of braking performance (*see notes 1 and 5*); and
- (e) in the case of a vehicle fitted with a forced ventilation system, the failure of the ventilation supply; and
- (f) where the components are suitable, the occurrence of a ground fault (isolation failure), accompanied by an audible warning (*see note 3*).

NOTE 1: The brake failure warning light specified in 2.4(1)(d) must be able to be tested by turning the ignition switch to 'start' or 'test' position.

NOTE 2: This requirement is necessary to provide an indication of remaining range

NOTE 3: A ground fault detection system may not be compatible with some components. Brushed DC systems will always have some earth leakage due to conductive dust from the motor brushes, and flooded batteries will also inevitably cause some earth leakage due to conductive mist vented during charging. A ground fault detection system as specified in 2.4(1)(f) should take account of the motor and battery type. The aim is to detect a ground between the battery voltage and the vehicle structure or body (if made of conductive material). To test (as part of the LVV certification process), a suitable resistor can be connected between several electrical positions within the battery group, and several places on the vehicle structure/body (including the structure near the battery), and check that the leakage detector detects it.

NOTE 4: Despite the requirement for an interlock device in 2.2(6)(a), LVVTA recommends that a warning light also indicates that an external battery charging system is connected.

NOTE 5: The handbrake and brake vacuum warning lights specified in 2.4(1)(c) and (d) are critical to show that the braking system is performing properly, as there is no back-up engine braking as would be available with an internal combustion engine.

NOTE 6: The ventilation supply warning light specified in 2.4(1)(e) for a gas venting situation should be active when the charging system is in operation.

### Accelerator

2.4(2) An electrically-powered low volume vehicle must have an accelerator pedal (*see note 2*), and an associated control mechanism for the control of the electrical motor and circuitry, incorporating a fail-safe design (*see note 1*).

NOTE 1: A single sliding contact-type potentiometer alone is not fail-safe, as a fault can cause a high reading and effectively full throttle. A hall effect sensor or wire-wound potentiometer is acceptable, but it must have secondary safety features such as a throttle-shut microswitch, brake-on microswitch, and double throttle return springs.

NOTE 2: A motorcycle may use an alternative control instead of a pedal, as appropriate.

### Transmission

2.4(3) The transmission of an electrically-powered low volume vehicle with an electric reversing switch fitted, must incorporate an operative inhibitor switch that will prevent the electric reverse switch from being inadvertently engaged during forward motion.

NOTE: Slow moving electric vehicles can be very quiet; LVVTA recommends that a reversing alarm which will be audible to nearby pedestrians is fitted. A wide angle rear-view camera may also reduce the risk to safety.

### Braking system

2.4(4) Where power assisted brakes, such as vacuum or air-boosted hydraulic brakes, are fitted to an electrically-powered low volume vehicle, the vehicle must incorporate, in order to ensure safe operation in the event of a power-assist supply failure during electric drive operation:

- (a) an alternative power supply, in order to maintain safe braking performance for a minimum of two stops; and
- (b) a brake failure warning light that notifies the driver of the situation, as required by 2.4(1)(d).

2.4(5) During a brake-performance test carried out as part of the low volume vehicle certification inspection process, any system that is supplementary to the type specified in 2.4(4) that may aid the braking process, such as electric motor regenerative braking, must be disengaged for the duration of that test, unless disengagement of the system is not possible (*see note 1*).

NOTE 1: 2.4(2) of LVV Standard 35-00 (Braking Systems) requires that a low volume vehicle is able to meet the specified brake performance requirements without the deliberate aid of engine compression. Therefore, any electrical equivalents must not be used to achieve the same effect.

NOTE 2: When any electric engine conversion (and associated batteries etc) results in a significant increase in mass, particular attention should be paid to the condition and durability of all braking components, including the rotors, calipers, pads, drums and shoes, along with wheel hubs and bearings.

## 2.5 Manufacturer's GVM and MAR

2.5(1) An electrically-powered low volume vehicle must not exceed the vehicle manufacturer's gross vehicle mass or either of the vehicle manufacturer's axle ratings, for that make and model of vehicle.

2.5(2) In the case of an electrically-powered low volume vehicle which, due to the addition of heavy components such as batteries, has an increased tare (unladen) weight, or a change in axle load distribution:

- (a) the spring rates and shock absorber damping capability must be suitable for the increased unladen vehicle mass or axle load, and enable the vehicle to maintain similar handling characteristics and comfort levels to that of its unmodified condition; and
- (b) the vehicle's wheel-stud number and size must be suitable for the increased unladen vehicle mass or axle load; and
- (c) the vehicle's increased unladen vehicle mass or axle load has not caused the load-rating of the tyres to be exceeded; and
- (d) the vehicle's steering characteristics are as good as would be expected from the vehicle despite its increased unladen vehicle mass or axle load; and
- (e) the vehicle's braking performance, both in one-off emergency braking and cyclic fade resistance brake-testing, is sufficient for the increased unladen vehicle mass or axle load; and
- (f) the amount of deflection throughout the vehicle's structure, both in bending and twisting, does not exceed, despite the increased unladen vehicle mass or axle load, that of the same make and model of vehicle in an unmodified form.

NOTE 1: The manufacturer's gross vehicle mass cannot exceed the sum of the manufacturer's axle ratings for the front and rear axles.

NOTE 2: When weighing a vehicle to determine that the manufacturer's GVM has not been exceeded, a simulated occupant weight of 80 Kg must be applied to each seating position, and any equipment must be in its maximum weight state, such as full water storage tanks.


## 2.6 Other requirements

### Warning labels

- 2.6(1) An LVVTA-approved warning label warning of electric shock hazard must be fitted on the covers of all compartments which contain high voltage connections, which incorporates the symbol of a triangle containing a lightning bolt, and the words 'high voltage', as shown in *diagram 1.1*.

NOTE 1: 'High voltage', as referred to in 2.6(1), is defined as exceeding 60V DC or 25V AC.

NOTE 2: It is intended that the labels make the presence of an electrical hazard obvious, however it is not intended that every component of the electrical system be individually labelled.

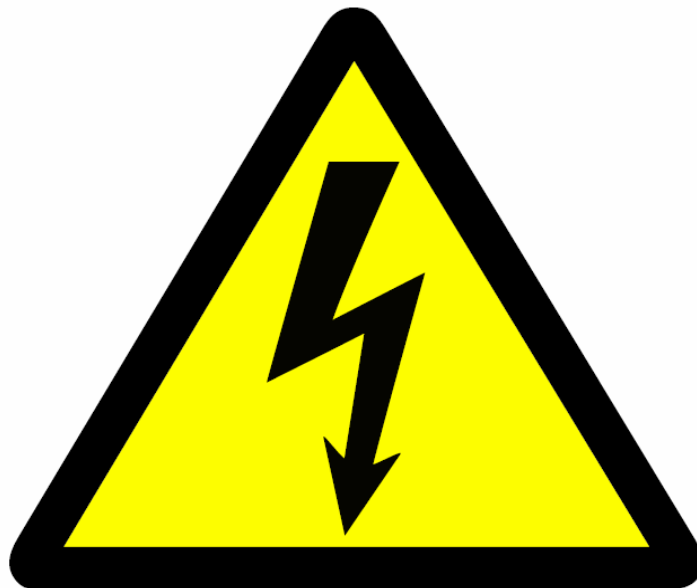

# High voltage

***Diagram 1.1 High Voltage warning label***

### Compliance with other technical requirements

- 2.6(2) An electrically-powered low volume vehicle must also meet any applicable technical requirements specified in:
- (a) *Low Volume Vehicle Standard 85-40 (Engine and Drive-train Conversions)*; and
  - (b) *Low Volume Vehicle Standard 195-00 (Suspension Systems)*; and

- (c) *Low Volume Vehicle Standard 155-30 (Frontal Impact); and*
- (d) *Low Volume Vehicle Standard 155-40 (Interior Impact); and*
- (e) *Chapter 5 (Chassis Modification and Construction) of the New Zealand Hobby Car Technical Manual; and*
- (f) *Chapter 18 (Attachment Systems) of the New Zealand Hobby Car Technical Manual.*

NOTE 1: All electrically-powered low volume vehicles, including those production vehicles with relatively straight-forward electric engine conversions, will potentially affect compliance with some parts of the LVV standards and NZ Hobby Car Technical Manual chapters listed in 2.6(2)(a) to (f), and therefore must be assessed against those standards and chapters in every case.

NOTE 2: Due to the high torque of electric motors, motor and transmission mounts may need to be stronger than original equipment types.

### **Extensively modified and scratch-built LVVs**

- 2.6(3) All electrically-powered low volume vehicles which are either scratch-built, or are modified to such an extent that they are beyond the scope of the applicable requirements referred to in 2.6(2)(a) to (f), must comply with any relevant design and construction requirements specified in the applicable chapter of the *New Zealand Hobby Car Technical Manual*.

## **Section 3 Exclusions to this standard**

---

No exclusions apply to this low volume vehicle standard.

## **Section 4 Vehicles that are not required to be certified to this standard**

---

### **4.1 Vehicles not covered by this standard**

- 4.1(1) A light vehicle is not required to be certified to this low volume vehicle standard, if the vehicle is modified for use for law enforcement or the provision of emergency services.

### **4.2 Vehicles that pre-date legal requirements**

- 4.2(1) A light vehicle is not required to be certified to this low volume vehicle standard, if the vehicle:

- (a) was converted to electric or hybrid power in New Zealand before 1 January 1992; or
- (b) was scratch-built using electric or hybrid power in New Zealand before 1 January 1992.
- (c) had modifications made to the electric or hybrid systems in New Zealand before 1 January 1992.

## Section 5 Terms and definitions within this standard

---

<b>Ampere (amp or A)</b>	means the unit of electric current; one ampere is the current passed by one volt through one ohm of resistance.
<b>Charging</b>	means the method of forcing electric current in the reverse direction into a storage battery, inducing a chemical change that stores the energy.
<b>Contactors</b>	means an electrically-controlled switch used for switching a power circuit, the higher current rating version of a relay
<b>Fail-safe</b>	means to default to the safest mode in the event of a common failure such as a broken connection in the switch wiring. Fail-safe design always starts with an assumption as to the most likely kind of wiring or component failure, and then tries to configure things so that such a failure will cause the circuit to act in the safest way, this being determined by the physical characteristics of the system.
<b>Fuel cell</b>	means a device that generates electricity from a chemical reaction, such as the interaction of hydrogen and oxygen through a catalytic membrane.
<b>Fuse, fusible link</b>	means a device that interrupts the electricity circuit if an overload occurs.
<b>Gross vehicle mass (GVM)</b>	means the combination of the tare (the un-laden weight of the vehicle), plus the amount of load that the manufacturer certifies that the vehicle can carry.
<b>Ground fault detector</b>	means a device that detects a connection between the battery and the body of a vehicle. Such a connection will allow a current to flow through a person who simultaneously touches the body of the vehicle and part of the battery during maintenance. A second connection between the vehicle body and a different part of the battery will allow current to flow through the vehicle body, potentially causing a fire or damaging the battery.
<b>High voltage</b>	means any situation where voltage exceeds 25 volts AC or 60 volts DC, as designated by UN/ECE regulations.

<b>Hybrid</b>	means a vehicle powered by two or more power sources, for example electric and petrol.
<b>Isolation switch</b>	means a switch that cuts the power. The master isolation switch allows the driver to cut power to the motor. The maintenance isolation switch disconnects the high voltage battery pack to enable access and maintenance.
<b>Manufacturer's axle rating (MAR)</b>	means the maximum load that the vehicle manufacturer certifies that the axle can carry.
<b>Original Equipment (OE)</b>	means as originally fitted by the vehicle manufacturer to that specific vehicle.
<b>Over-current trip</b>	means a device which automatically interrupts the electrical current in a circuit if the level of this current exceeds a defined limit value. Fuses and circuit breakers (but never the motor circuit breaker) count as over-current trips. Extra fast electronic circuit fuses and fast fuses are appropriate.
<b>Regenerative braking</b>	means a braking effort due to the electric traction motor acting as a generator and returning energy to the traction batteries.
<b>Short circuit</b>	means an abnormal low-resistance connection in an electrical circuit. This results in an excessive electric current and potentially causes circuit damage, overheating, fire or explosion.
<b>Solar cell</b>	means a device that converts sunlight to electricity.
<b>Thermal runaway</b>	means generation of heat in a battery to a dangerous level. If batteries are charged too fast, heat is generated which in turn creates Hydrogen (known as gassing). As the battery heats up, more hydrogen is created and the risk of explosion increases. The danger posed by high Hydrogen concentrations is one of the reasons that batteries must be installed in well-ventilated areas.
<b>Torque</b>	means rotating effort produced by applying a force to a lever arm about a pivot.
<b>Volt (V)</b>	means the unit of electrical pressure, or electromotive force.

NOTE: The terms and definitions found in section 5 are limited to those terms and definitions that are unique to this low volume vehicle standard, and are not necessarily contained within the terms and definitions section of the Low Volume Vehicle Code.